

A Solution to Incompatibility Between IPv6 and IPv4 Communications

(IPv10 Draft Specification)

Khaled Omar Ibrahim Omar

6th of October City, Giza, Egypt

Passport ID no.: A19954283, Phone: +2 01003620284

E-mail: eng.khaled.omar@hotmail.com

Abstract—It has been about one year since last hearing anything about the Internet Protocol v10 (IPv10) proposal while this week it's now available in draft form. While IPv6 isn't widely-adopted around the globe yet, IPv10 is already in development and helps to address some of the woes of IPv6. IPv10 is designed to allow IPv6 addresses to communicate to/from IPv4 addresses. IPv10 hopes to speed the adoption to IPv6 addressing by making it more backwards compatible with IPv4 with allowing the two Internet Protocol standards to better coexist.

From the draft specification: "It solves the issue of allowing IPv6 only hosts to communicate to IPv4 only hosts and vice versa in a simple and very efficient way, especially when the communication is done using both direct IP addresses and when using hostnames between IPv10 hosts, as there is no need for protocol translations or getting the DNS involved in the communication process more than its normal address resolution function. IPv10 allows hosts from two IP versions (IPv4 and IPv6) to be able to communicate, and this can be accomplished by having an IPv10 packet containing a mixture of IPv4 and IPv6 addresses in the same IP packet header."

Keywords-IPv4; IPv6; IPv10

IPv10 is the proposed name as $IPv10 = IPv4 + IPv6$. The draft specification can be found at IETF.org and will expire in March 2018.

I. SPECIFICATION

Internet Protocol version 10 (IPv10)

Draft-omar-IPv10-06

Khaled Omar

Internet-Draft

The Road

Intended status: Standards Track

Expires: March 2, 2018

September 2, 2017

A. Status of this Memo

This Internet-Draft is submitted in full conformance with the provisions of BCP 78 and BCP 79.

Internet-Drafts are working documents of the Internet Engineering Task Force (IETF). Note that other groups may also distribute working documents as Internet-Drafts. The list of current Internet-Drafts is at <http://datatracker.ietf.org/drafts/current/>.

Internet-Drafts are draft documents valid for a maximum of six months and may be updated, replaced, or obsolete by other documents at any time.

It is in appropriate to use Internet-Drafts as reference material or to cite them other than as "work in progress."

This Internet-Draft will expire on March 2, 2018.

B. Copyright Notice

Copyright (c) 2017 IETF Trust and the persons identified as the document authors. All rights reserved. This document is subject to BCP 78 and the IETF Trust's Legal Provisions Relating to IETF Documents (<http://trustee.ietf.org/license-info>) in effect on the date of publication of this document. Please review these documents carefully, as they describe your rights and restrictions with respect to this document. Code Components extracted from this document must include Simplified BSD License text as described in Section 4.e of the Trust Legal Provisions and are provided without warranty as described in the Simplified BSD License.

This document specifies version 10 of the Internet Protocol (IPv10), sometimes referred to as IP Mixture (IPmix).

IP version 10 (IPv10) is a new version of the Internet Protocol, designed to allow IP version 6 [RFC-2460] to communicate to IP version 4 (IPv4) [RFC-791] and vice versa. Internet is the global wide network used for communication between hosts connected to it. These connected hosts (PCs, servers, routers, mobile devices, etc.) must have a global unique address to be able to communicate through the Internet and these unique addresses are defined in the Internet Protocol (IP).

II. THE FIRST VERSION OF THE INTERNET PROTOCOL OF IPV4.

When IPv4 was developed in 1975, it was not expected that the number of connected hosts to the Internet reach a very huge number of hosts, more than the IPv4 address space; also it was aimed to be used for experimental purposes in the beginning. IPv4 is (32-bits) address that allowing approximately 4.3 billion unique IP addresses.

A few years ago, with the massive increase of connected hosts to the Internet, IPv4 addresses started to run out. Three short-term solutions (CIDR, Private

addressing, and NAT) were introduced in the mid-1990s but even with using these solutions, the IPv4 address space ran out in February, 2011 as announced by IANA, The announcement of depletion of the IPv4 address space by the RIRs is as follows:

- * April, 2011: APNIC announcement.
- * September, 2012: RIPE NCC announcement.
- * June, 2014: LACNIC announcement.
- * September, 2015: ARIN announcement.

A long term solution (IPv6) was introduced to increase the address space used by the Internet Protocol and this was defined in the Internet Protocol version 6 (IPv6). IPv6 was developed in 1998 by the Internet Engineering Task Force (IETF).

III. IPV6

IPv6 is (128-bits) address and can support a huge number of unique IP addresses that is approximately equals to 2^{128} unique addresses. So, the need for IPv6 became a vital issue to be able to support the massive increase of connected hosts to the Internet after the IPv4 address space exhaustion. The migration from IPv4 to IPv6 became a necessary thing, but unfortunately, it would take decades for this full migration to be accomplished.

19 years have passed since IPv6 was developed, but no full migration happened till now and this would cause the Internet to be divided into two parts, as IPv4 still dominating on the Internet traffic (85% as measured by Google in April, 2017) and new Internet hosts will be assigned IPv6-only addresses and be able to communicate with 15% only of the Internet services and apps. So, the need for solutions for the IPv4 and IPv6 coexistence became an important issue in the migration process as we cannot wake up in the morning and find all IPv4 hosts are migrated to be IPv6 hosts, especially, as most enterprises have not do this migration for creating a full IPv6 implementation.


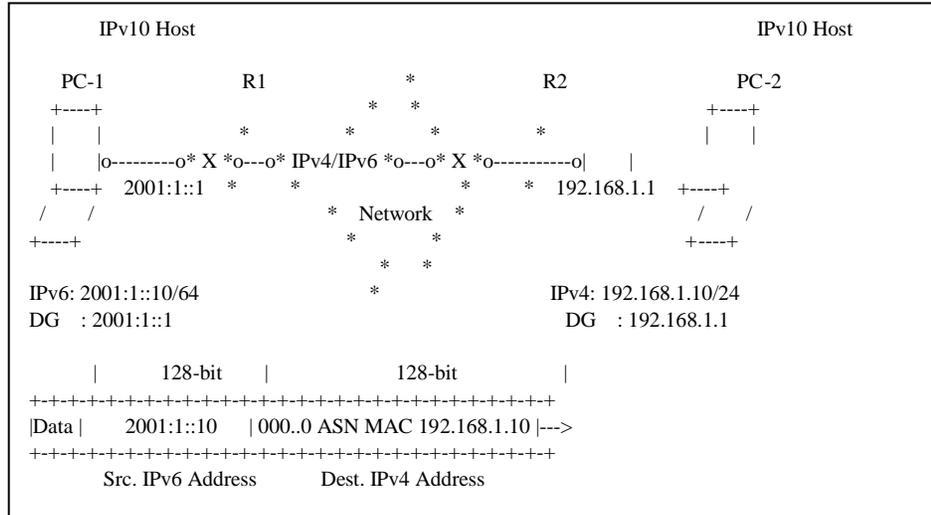


Figure 1. IPv6 host to IPv4 host

B. IPv10: IPv4 Host to IPv6 Host.

1) IPv10 Packet

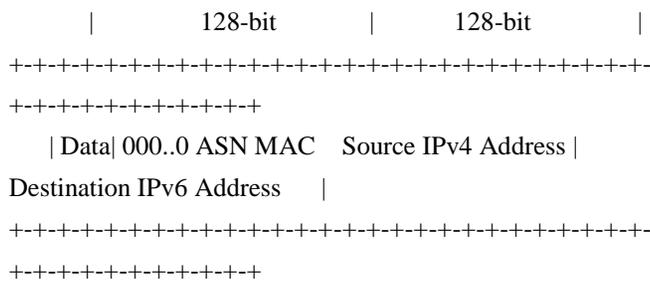

IP Address: IPv4 Address
 Subnet Mask: /mask
 Default Gateway: IPv4 Address
 DNS Addresses: IPv4/IPv6 Address

3) Example of IPv10 Operation

R1 & R2 have both IPv4/IPv6 routing enabled are as figure2.

2) Sending IPv10 host TCP/IP Configuration:

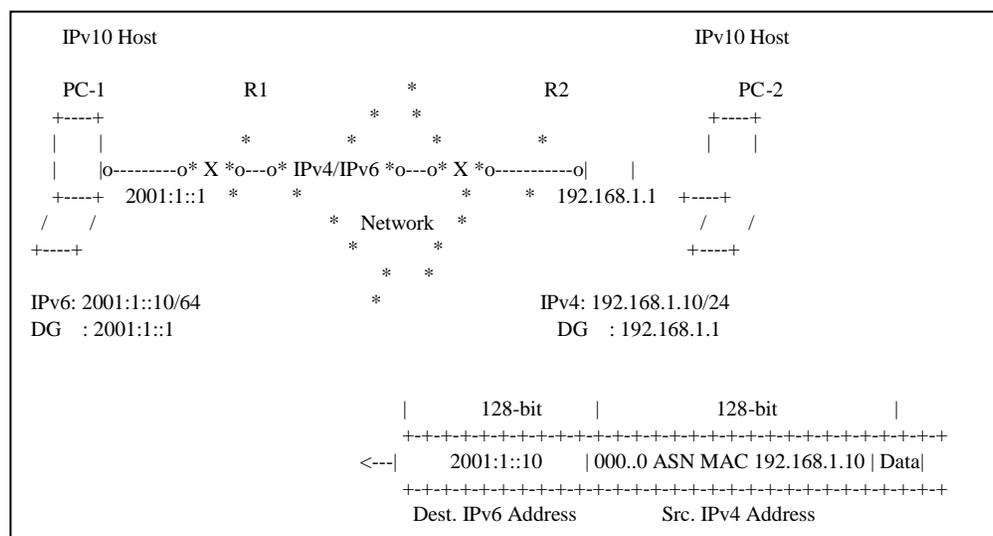


Figure 2. IPv4 host to IPv6 host

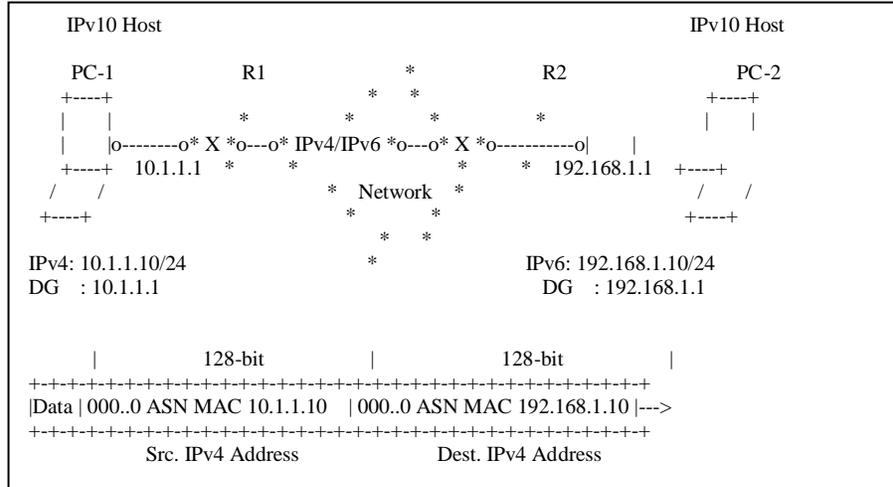


Figure 4. IPv4 host to IPv4 host

Important Notes: IPv4 and IPv6 routing must be enabled on all routers, so when a router receives an IPv10 packet, it should use the appropriate routing table based on the destination address within the IPv10 packet.

That means, if the received IPv10 packet contains an IPv4 address in the destination address field, the router should use the IPv4 routing table to make a routing decision, and if the received IPv10 packet contains an IPv6 address in the destination address field, the router should use the IPv6 routing table to make a routing decision.

All Internet connected hosts must be IPv10 hosts to be able to communicate regardless the used IP version, and the IPv10 deployment process can be accomplished by ALL technology companies developing OSs for hosts networking and security devices.

VI. IPV10 PACKET HEADER FORMAT

The following figure 5 shows the IPv10 packet header which is almost the same as the IPv6 packet header.

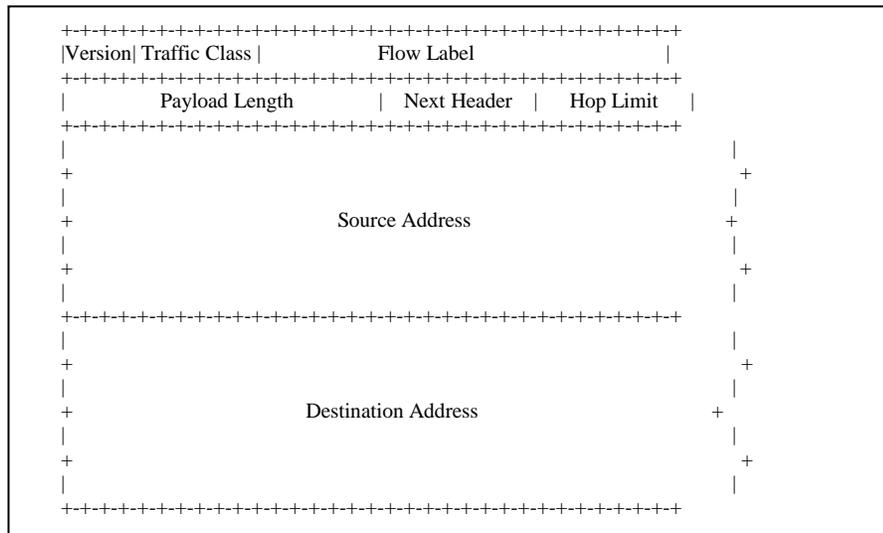


Figure 5. IPv10 packet header

1) *Version*

4-bit Internet Protocol version number.

- 0100 : IPv4 Packet

(Src. and dest. are IPv4).

- 0110 : IPv6 Packet

(Src. and dest. are IPv6).

- 1010 : IPv10 Packet

(Src. and dest. are IPv4/IPv6).

2) *Traffic Class*

8-bit traffic class field.

3) *Flow Label*

20-bit flow label.

4) *Payload Length*

16-bit unsigned integer. Length of the payload, i.e., the rest of the packet following this IP header, in octets. (Note that any extension headers [section 4] present are considered part of the payload, i.e., included in the length count.)

5) *Next Header*


8-bit selector. Identifies the type of header immediately following the IP header.

6) *Hop Limit*


8-bit unsigned integer. Decrement by 1 by each node that forwards the packet. The packet is discarded if Hop Limit is decremented to zero.

7) *Source Address*

128-bit address of the originator of the packet.

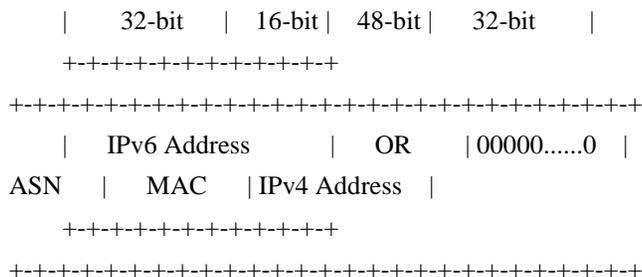

128-bit address of the intended recipient of the packet (possibly not the ultimate recipient, if a Routing header is present).

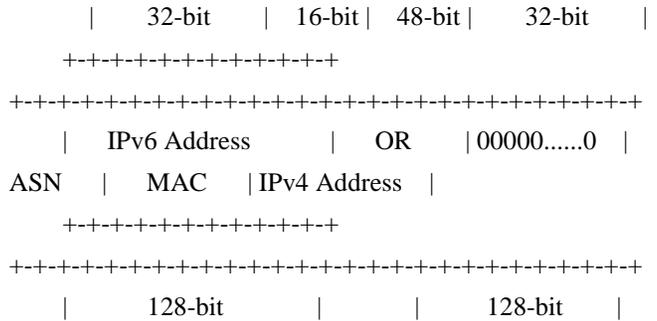

VII. ADVANTAGES OF IPV10

- Introduces an efficient way of communication between IPv6 hosts and IPv4 hosts.
- Allows IPv4 only hosts to exist and communicate with IPv6 only hosts even after the depletion of the IPv4 address space.
- Adds flexibility when making a query sent to the DNS for hostname resolution as IPv4 and IPv6 hosts can communicate with IPv4 or IPv6 DNS servers and the DNS can reply with any record it has (either an IPv6 record Host AAAA record or an IPv4 record Host A record).
- There is no need to think about migration as both IPv4 and IPv6 hosts can coexist and communicate to each other which will allow the usage of the address space of both IPv4 and IPv6 making the available number of connected hosts be bigger.
- IPv10 support on "all" Internet connected hosts can be deployed in a very short time by technology companies developing OSs (for hosts and networking devices, and there will be no dependence on enterprise users and it is just a software development process in the NIC

cards of all hosts to allow encapsulating both IPv4 and IPv6 in the same IP packet header.

- Offers the four types of communication between hosts:
 - IPv6 hosts to IPv4 hosts (6 to 4).
 - IPv4 hosts to IPv6 hosts (4 to 6).
 - IPv6 hosts to IPv6 hosts (6 to 6).
 - IPv4 hosts to IPv4 hosts (4 to 4).

VIII. SECURITY CONSIDERATIONS

The security features of IPv10 are described in the Security Architecture for the Internet Protocol [RFC-2401].

IANA Considerations: IANA must reserve version number 10 for the 4-bit Version Field in the Layer 3 packet header for the IPv10 packet.

IX. FULL COPYRIGHT STATEMENT

Copyright (C) IETF (2017). All Rights Reserved.

This document and translations of it may be copied and furnished to others, and derivative works that comment on or otherwise explain it or assist in its implementation may be prepared, copied, published and distributed, in whole or in part, without restriction of any kind, provided that the above copyright notice and this paragraph are included on all such copies and derivative works. However, this document itself may

not be modified in any way, such as by removing the copyright notice or references, except as needed for the purpose of developing Internet standards in which case the procedures for copyrights defined in the Internet Standards process must be followed, or as required to translate it into languages other than English.

The limited permissions granted above are perpetual and will not be revoked.

This document and the information contained herein is provided on the internet engineering task force disclaims all warranties, express or implied, including but not limited to any warranty that the use of the information herein will not infringe any rights or any implied warranties of merchantability or fitness for a particular purpose.

ACKNOWLEDGMENTS

The author would like to thank S. Krishnan, W. Haddad, C. Huitema, T. Manderson, JC. Zuniga, A. Sullivan, , K. Thomann, M. Abrahamsson, S. Bortzmeyer, J. Linkova, T. Herbert and Lee H. for the useful inputs and discussions about IPv10.

REFERENCES

- [1] [RFC-2401] Stephen E. Deering and Robert M. Hinden, "IPv6 Specification", RFC 2460, December 1998.